


Photoelectrics Through-beam, Transistor Output Type PB18CNT15..

CARLO GAVAZZI



- Safety Edge sensor for doors
- Range 15 m
- Modulated, infrared light
- Supply voltage: 10 to 30 VDC
- Output: 100 mA, NPN or PNP type
- Make or break switching
- Protection: reverse polarity, short circuit, transients
- Cable versions with or without connector
- Emitter mute and power adjustment
- CE, UL325 and UL508 approved

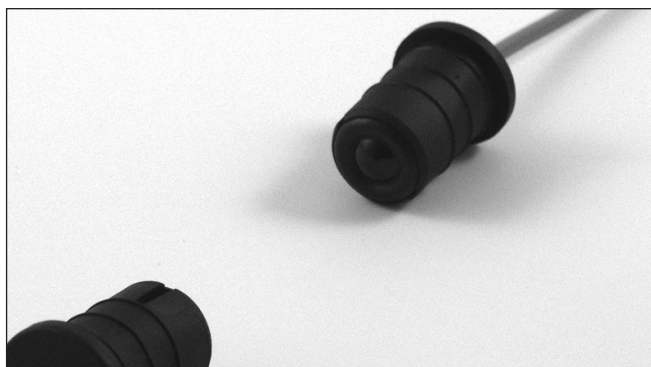

Product Description

The PB18CNT. is a through beam sensor set specific designed for safety edge sensing in industrial automatic doors. The housing is designed to fit a Ø18 mm rubber profile and has integrated sealing

lips to prevent water from entering the profile. The emitter has a mute input to turn it off for evaluation of the sensor function. Available in 10-30 VDC version.

Ordering Key

PB18CNT15NO-C2

Type _____
Housing style _____
Housing size _____
Housing material _____
Sensor code _____
Detection principle _____
Sensing distance _____
Output type _____
Output configuration _____
Cable connector _____

Type Selection

Housing diameter	Range S _n	Con-nec-tor	Ordering no. Receiver NPN, NO	Ordering no. Receiver NPN, NC	Ordering no. Receiver PNP, NO	Ordering no. Receiver PNP, NC	Ordering no. Emitter
Ø 18 mm	15 m	NO	PB18CNT15NO	PB18CNT15NC	PB18CNT15PO	PB18CNT15PC	PB18CNT15
Ø 18 mm	15 m	YES	PB18CNT15NO-C2	PB18CNT15NC-C2	PB18CNT15PO-C2	PB18CNT15PC-C2	PB18CNT15-C2

Note: Please order emitter and receiver separately

Specifications Emitter

Rated operational volt. (U _B)	10 to 30 VDC	Light source	LED, 880 nm
Ripple (U _{rrp})	≤ 10%	Light type	Infrared, modulated
Supply current	≤ 20 mA	Optical angle	± 5°
Protection	Reverse polarity, transients	Indication function	Power supply ON Mute input ON
Control input			LED, green LED, green flashing
Normal oper.	> 1.5 VDC	Power adjustment	0 - 100%, in 20 steps
Mute	< 1.2 VDC	R _x ~ 3 kΩ -10 kΩ	

Specifications Receiver

Rated operating dist. (S_n)	15 m	Optical angle	$\pm 5^\circ$
Blind zone	None	OFF-state current (I_r)	$\leq 100 \mu A$
Temperature drift	$\leq 0.4\%/^\circ C$	Voltage drop (U_d)	$\leq 1.6 \text{ VDC @ } 100 \text{ mA}$
Hysteresis (H)	3 - 20%	Protection	Short-circuit, reverse polarity, transients
Rated operational volt. (U_B)	10 to 30 VDC (ripple included)	Operating frequency (f)	100 Hz
Ripple (U_{rp})	$\leq 10\%$	Response time	OFF-ON (t_{ON}) $\approx 3.5 \text{ ms}$ ON-OFF (t_{OFF}) $\approx 6.5 \text{ ms}$
Output current		Power ON delay (t_v)	$\leq 300 \text{ ms}$
Continuous (I_o)	$\leq 100 \text{ mA}$	Output function	NPN or PNP
Short-time (I)	$\leq 100 \text{ mA}$, (max. load capacity 100 nF)	Indication function	Output ON
No load supply current (I_o)	$\leq 13 \text{ mA}$		LED, yellow
Minimum operational current (I_m)	0.5 mA		
Ambient light	>20.000 LUX		

General Specifications

Environment		Housing material	
Overvoltage category	II (IEC 60664/60664A, 60947-1)	Body	PTE black
Pollution degree	3 (IEC 60664/60664A, 60947-1)	Front glass	PC black
Degree of protection	IP 67 (IEC 60529, 60947-1)	Connection	
Temperature		Cable	PVC, TX: grey / RX: black, 5 m, 3 x 0.14 mm ² , Ø 2.9 mm
Operating	-20° to +50°C (-4° to +122°F)	Weight	
Storage	-25° to +80°C (-13° to +176°F)	Emitter	80 g
Vibration	10 to 150 Hz, 0.5 mm/7.5 g (IEC 60068-2-6)	Receiver	80 g
Shock	2 x 1 m & 100 x 0.5 m (IEC 60068-2-32)	CE-marking	EN12445, EN12453, EN12978
Rated insulation voltage	50 VDC	UL-Approval	cURus cULus
			UL325, CSA-C22.2 No.247 UL508

Operation Diagram

t_v = Power ON delay

Power supply

Target emitter present





Object present

Break (NC) Output ON


Make (NO) Output ON

Mute active $\leq 1.2 \text{ VDC}$


Installation Hints

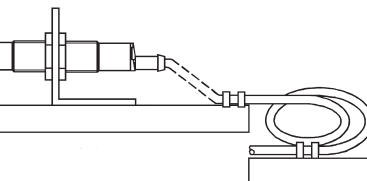To avoid interference from inductive voltage/current peaks, separate the prox. switch power cables from any other power cables, e.g. motor, contactor or solenoid cables 	Relief of cable strain  The cable should not be pulled	Protection of the sensing face  A proximity switch should not serve as mechanical stop	Switch mounted on mobile carrier  Any repetitive flexing of the cable should be avoided
---	---	---	--


Dimensions

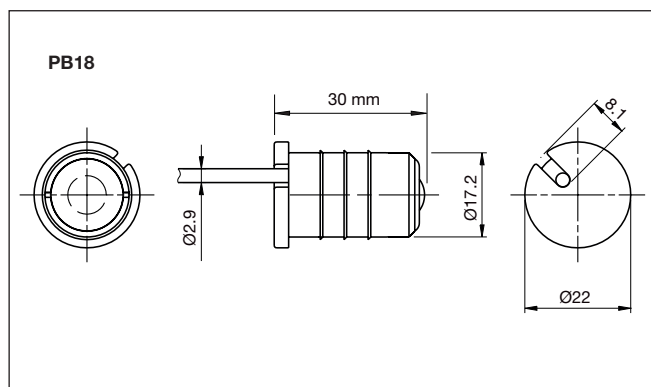


Detection Diagram

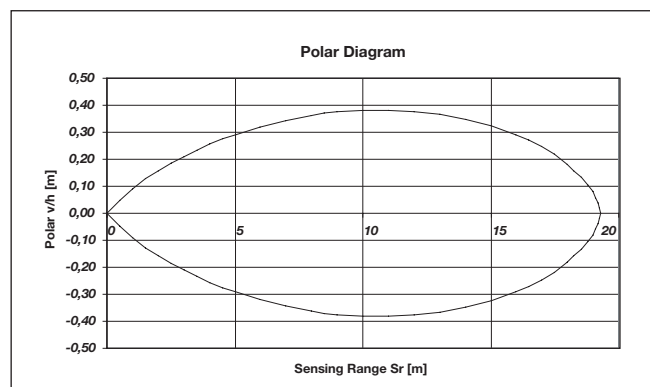

Wiring Diagram

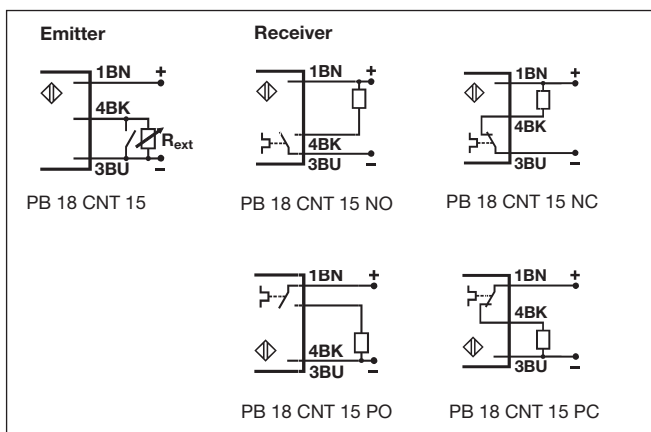

Excess Gain

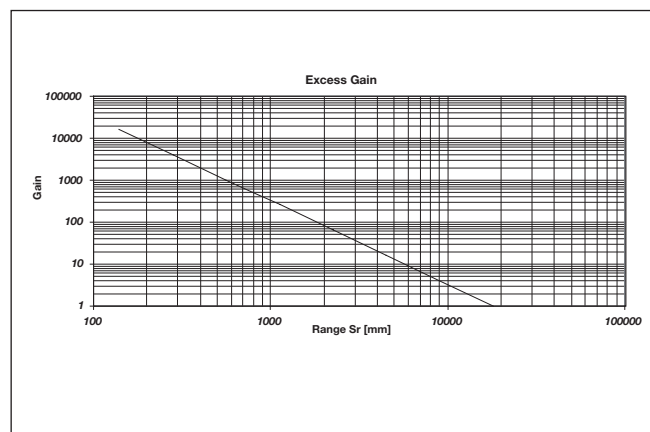

Delivery Contents

- PB18
- Installation instruction
- **Packaging:** plastic bag